
◆FAG □ D 80-180mm 【SX011828SX011828 】--PDF 哈尔滨贝尔轴承有限公司 www.hrbbearing.net 0451-88309818 0451-55103249(电商部直线)


## 交叉滚子轴承


### D 80-180mm-SX011828SX011828









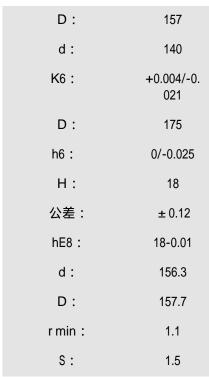

# 运转精度:

径向:0.015轴向:0.01

## 正常游隙mm:

径向游隙min:	0	
径向游隙max:	0.02	
轴向倾斜游隙min:	0.01	
轴向倾斜游隙max:	0.04	

### 小游隙RLO mm:

径向 max:	0.004
预载 max:	0.008

预载VSP mm:

kNm					
10-					 =
6)	(3)	9/0	3/0/	1	
M <sub>cq</sub>		11			

ion ion							
M <sub>OQ</sub> 0.1-			0		3	0	
0.01	50	100	150 F <sub>0q</sub>	200	250	kN	30

TEL:0451-88301618

min: 0.005 max: 0.02

基本额定载荷轴向:

动载荷 N: 63

静载荷 N: 240

基本额定载荷:

动载荷 N: 45

静载荷 N: 96

极限转速:

带普通游隙: 975

带普通游隙: 485

带预载: 485

.